

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04J 3/16, H04Q 7/00	A1	(11) International Publication Number: WO 95/12933
		(43) International Publication Date: 11 May 1995 (11.05.95)

(21) International Application Number: PCT/US94/12614
(22) International Filing Date: 1 November 1994 (01.11.94)

(30) Priority Data:
08/147,254 1 November 1993 (01.11.93) US
08/331,952 31 October 1994 (31.10.94) US

(71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON
[SE/SE]; S-126 25 Stockholm (SE).

(71)(72) Applicant and Inventor: FEHNEL, Michael, D. [US/US];
2031 Bentwillow Drive, Fuquay-Varina, NC 27526 (US).

(72) Inventor: TURCOTTE, Joseph, Eric; Apartment 1B, 460
Aberland, Nuns Island, Montreal, Quebec H3E 1B5 (CA).

(74) Agent: GRUDZIECKI, Ronald, L.; Burns, Doane, Swecker
& Mathis, Washington and Prince Streets, P.O. Box 1404,
Alexandria, VA 22313-1404 (US).

(81) Designated States: AU, BR, CA, CN, FI, JP, KR, NZ,
European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR,
IE, IT, LU, MC, NL, PT, SE).

Published

With international search report.

*Before the expiration of the time limit for amending the
claims and to be republished in the event of the receipt of
amendments.*

(54) Title: A MESSAGE TRANSMISSION SYSTEM AND METHOD FOR A RADIOCOMMUNICATION SYSTEM

Information Element	Direction	Type	Length
Message Type Indicator (MTI)	B → MS	M	3 bits
Reply Option (RO)	B → MS	M	1 bits
Urgency Indicator (UI)	B → MS	M	2 bits
Privacy Indicator (PI)	B → MS	M	2 bits
Message Reference	B → MS	M	6 or 13 bits
User Data Unit	B → MS	M	2 - * octets
User Originating Address	B → MS	O	2 - * octets
User Originating Subaddress	B → MS	O	2 - * octets
Message Center Time Stamp	B → MS	O	8 octets

(57) Abstract

A method and system for message signalling in a radiocommunication system are disclosed (fig. 5). Privacy (PI) and urgency indicators (UI) and subaddressing can be provided to segregate messages in a hierarchical manner. User acknowledgment and reply functionality is incorporated.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

A MESSAGE TRANSMISSION SYSTEM AND METHOD FOR A RADIOCOMMUNICATION SYSTEM

The disclosure of U.S. Patent Application Serial No. 08/147,254, entitled "A Method for Communicating in a Wireless Communication System", filed on November 1, 1993, is incorporated in this application by reference.

BACKGROUND

The present invention generally relates to radiocommunication systems and methods for signalling in radiocommunication systems and, more particularly, to systems and methods for sending messages using a digital control channel in such systems.

One radiocommunication system is described by the GSM, a European standard for radiocommunication which is intended to provide uniformity so that users can access radiocommunication systems throughout Europe with minimal equipment compatibility problems. The GSM includes specifications for many types of subscriber services, including a message function service called the Short Message Service (SMS) which provides for the transmission of messages having up to 160 alphanumeric characters to be sent to a subscriber at his or her remote unit. These messages originate, for example, from mobile units transmitting them to a service center for subsequent transmission to the designated subscriber ("mobile-originated") or from any wire-based system simply by calling an operator at the service center who types the message into the system ("mobile-terminated").

However, the short message service of GSM suffers from many drawbacks and limitations and, accordingly, has not been universally accepted or implemented in other systems, for example the North American digital radiocommunication system standardized as IS-54B.

For example, security for the short message service is almost non-existent in the GSM. Although the SMS enjoys the same authentication protection which is provided to other messages transmitted over the air interface using, for

example, the mobile identification number (MIN) and/or the electronic serial number (ESN), to ensure that messages are received only by the intended remote unit, such authentication procedures provide no protection for short messages once they have been received by the intended remote unit. Thus, these messages
5 are readily displayable, or otherwise reviewable, by any individual using the remote unit. In the event that, for example, a subscriber loans his or her remote unit to another individual, it may be undesirable for these messages to be so readily obtainable.

Other features are also lacking in the GSM message service. For
10 example, mechanisms for delaying delivery of the message, urgency indications, user acknowledgment, sufficient addressing capability, and validity periods for delivery are not found in the GSM.

SUMMARY

These and other drawbacks and limitations of conventional radio
15 communication systems and methods are overcome according to the present invention. According to exemplary embodiments, a field can be provided in the SMS message sent to the remote unit indicating an access level associated with that message. The user interface of the remote unit can be equipped with a mechanism for restricting access to messages depending upon the access code
20 indicated by the field. Thus, for example, a user may need to enter an appropriate code in order to view the message.

Similarly, the signalling interface between mobile stations and the network is modified to provide for delaying delivery of the message, urgency indications, user acknowledgment, sufficient addressing capability, and validity periods for
25 delivery.

BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing objects, features and advantages of the present invention will be more readily understood upon reading the following detailed description in conjunction with the drawings in which:

- 5 Figure 1 is a block diagram of an exemplary system for routing messages;
 Figure 2(a) illustrates an exemplary R-DATA message format according to an exemplary embodiment of the present invention;
 Figure 2(b) illustrates an exemplary R-DATA ACCEPT message format;
 Figure 2(c) illustrates an exemplary R-DATA REJECT message format;
10 Figure 3(a) illustrates an exemplary SMS DELIVER message format;
 Figure 3(b) depicts an exemplary SMS USER ACK message format;
 Figure 3(c) illustrates an exemplary user data information element message format;
 Figure 3(d) depicts an exemplary user originating address format;
15 Figure 3(e) shows an exemplary user originating subaddress format;
 Figure 3(f) illustrates an exemplary bit format for the information elements shown in Figure 3(a);
 Figure 3(g) is an exemplary SMS DELIVER message;
 Figure 3(h) is an exemplary R-DATA message encapsulating the message
20 of Figure 3(g);
 Figure 4(b) is an exemplary SMS SUBMIT message format;
 Figure 4(b) is an exemplary deferred delivery information element format for relative time expression;
 Figure 4(c) is an exemplary deferred delivery information element format
25 for an absolute time expression; and
 Figure 5 represents a block diagram of an exemplary cellular mobile radio telephone system.

DETAILED DESCRIPTION

In order to fully describe benefits attributable to the present invention, a first exemplary embodiment is described below using the GSM as an illustration. A second exemplary embodiment discusses the present invention in terms of the American Standard IS-54B and the digital control channel disclosed in the above-incorporated by reference application. However, those skilled in the art will readily appreciate that the present invention can be applied to message services regardless of how those services may be implemented according to any given standard.

10 When a message is delivered from a service center to a mobile unit, under the GSM specification such a message is termed a "mobile terminated short message" (MTSM). If the message also originates at a mobile unit, the signal to the service center requesting the message is termed a "mobile originated short message" (MOSM). The general process for transmitting and receiving
15 such messages will now be described with respect to Figure 1.

 An MTSM originates after a request to service center 2, which is a node that is interfaced with a gateway mobile services switching center (GMSC) 4. The network port provided by gateway mobile services switching centers are typically further described as "interworking" when messages are being sent in the
20 direction from the GMSC to a service center, however this additional term has been dropped to simplify the description of these centers in this document. The GMSC acts as a port into the public land mobile network. The service center stores message service profiles detailing the preferences and subscription details of each subscriber with respect to messages for each of the mobile units which it
25 services. For example, a particular subscriber may prefer that messages be transmitted in the form of facsimiles rather than other types of media (e.g., a short message displayed at the remote terminal) or a subscriber may prefer that the messages which he or she generates be copied and stored prior to transmission.

The request to send a message to a subscriber can be transmitted to the service center 2 in many ways, e.g., by calling an operator in the service center, by facsimile message to the service center, etc. A message is then transmitted to the GMSC 4 using, for example, an interface specified in a document entitled

5 "Technical Report, GSM 03.47", which is incorporated here by reference. The recipient remote station is identified by, for example, its MSISDN number.

Before the GMSC 4 can deliver the message through the chain of nodes to the base station 12 which is serving the recipient's remote station, the GMSC 4 first interrogates the recipient's home location register (HLR) 6 to obtain routing

10 information for the message. The HLR 6 stores data relating to subscribers including, for example, status (connected or disconnected), current location of the subscribers' equipment, directory number (MSISDN), radio number plan identification (e.g., International Mobile Subscriber Identity (IMSI)), supplementary service profiles and teleservice profiles. To interrogate the home

15 location register 6, a GSM MAP message called "Send Routing Information for Short Message" is sent by the GMSC 4 to the home location register 6. The appropriate home location register can be determined using the recipient's MSISDN, e.g., by translating the MSISDN into a CCITT No. 7 address.

After receiving the routing information, and if the recipient remote station

20 is currently connected, the GMSC 4 forwards the message to the mobile services switching center (MSC) 8 which is currently serving the recipient's remote station. The MSC 8 provides an interface for switching functions and hardware control which are used when establishing a call. Note that for purposes of simplicity the visitor location register (VLR) has been illustrated in Figure 1 as

25 being integrated with the MSC, although in practice these two nodes can be physically separated. The VLR contains a copy of the information pertaining to a remote unit which is stored in the mobile unit's home location register when the remote unit has roamed into the service area of that VLR, the VLR being updated with information from a subscriber's home location register.

The message is then delivered to the mobile unit 10 via a base station 12 over the air interface. Acknowledgement signals are then transmitted back through the chain of nodes. If the remote unit is turned off, or not otherwise active in the system, a short message is stored at the service center 2 for later delivery. Then, when the remote system is powered up and after registration, the short message is again sent out to the remote unit where it is stored in a memory device therein.

According to an exemplary embodiment of the present invention, a privacy field can be added to the short message by the originator such that in order to output the short message from the remote unit, a user must provide an appropriate input to view the message. A more detailed example of privacy fields, and other novel message service features, will now be described with respect to an exemplary signalling system according to the present invention in which a digital control channel exists, for example, the system described in the above-identified and incorporated application.

The message service operations to be described use three bi-directional messages denoted herein as R-DATA, R-DATA ACCEPT and R-DATA REJECT. Figure 2(a) illustrates an exemplary R-DATA message. Therein, the message type information element identifies the R-DATA message, the R-transaction identifier provides a numerical reference for the message, the R-DATA unit information element carries the SMS message and the message center address is an optional information element which can be included by the message center for mobile terminated messages. An exemplary R-DATA ACCEPT message is illustrated in Figure 2(b). Therein, the message type information element identifies this message as an R-DATA ACCEPT message. The R-transaction identifier information element returns the same identifier as was found in the earlier R-DATA message being accepted. Similarly, an exemplary R-DATA REJECT message is illustrated in Figure 2(c). This message is used to acknowledge and reject the R-DATA message. The exemplary message format includes a message type information element, an R-transaction identifier, and an

R-Cause information element which provides information regarding the cause of the rejection. As with the aforescribed GSM system, the operations are described in two categories: mobile-terminated messages and mobile-originated messages.

5 The mobile-terminated message service includes delivery of a message from the message center (e.g., an SMS DELIVER application message) to the mobile. If the mobile is "camping" on the digital control channel, i.e., isn't currently involved in a call but is powered on, the base station can page the mobile and wait to receive a page response message therefrom. Once the base
10 has received the page response, the base sends the R-DATA message, which contains the SMS DELIVER application message, to the mobile station. The R-DATA message can also be used to send an SMS DELIVER message when a mobile station is involved in a call on a traffic channel.

 An exemplary SMS DELIVER application message is illustrated in Figure
15 3(a). Therein, the first column provides a title for each information element, the second column indicates that each information element in the message is being transmitted from the base station to a mobile station, the third column designates certain information elements as "mandatory" and others as "optional", and the fourth column provides an exemplary bit length for each element. Of course,
20 those skilled in the art will appreciate that such designations are system specific and that fields designated as "mandatory" in the Figures need not be mandatory for other implementations. The function of each information element will now be described in more detail.

 The message type indicator informs the mobile station that this message is
25 an SMS DELIVER message. The next information element, entitled "Reply Option", indicates if user acknowledgment of the message is requested. For example, a binary zero for this bit can be used to indicate that user acknowledgment is not required and a binary one can be used to indicate that user acknowledgment is required. More bits could be provided to this field to
30 add additional functionality, such as optional user acknowledgment.

User acknowledgment can be provided by sending an SMS USER ACK message from the mobile station in response to an SMS DELIVER message having the reply option set to indicate that user acknowledgment is required. An exemplary SMS USER ACK message is illustrated in Figure 3(b). Most of the information elements depicted in Figure 3(b) will be described subsequently with respect to other messages. However, the response code information element is used in the SMS USER ACK message to provide a response to the message originator, the values of which are system specific.

The urgency indicator is used to allow the sender of a message to provide levels of urgency thereto. For example, the mobile could use the urgency indicator to provide different types of notification to the message recipient. Other potential uses for this indicator include: storage priority or order of retrieval from memory. An exemplary usage for the bits in this information element is illustrated in the table below.

Table 1

BITS	DESCRIPTION
00	Bulk
01	Normal
10	Urgent
11	Very Urgent

The privacy indicator element, described briefly above, is used to allow the sender to set a level of privacy to the message being sent. Thus, the mobile receiving an SMS DELIVER message may process the message differently based on the level of privacy appended thereto. For example, different passwords may be required to be entered by the mobile user before reading the SMS DELIVER messages based upon the code found in this field. An exemplary usage for the bits in this field is illustrated below in Table 2.

Table 2

BITS	DESCRIPTION
00	Not Restricted
01	Restricted
10	Confidential
11	Secret

5

10

15

The message reference element provides a reference number which can be used by message originators to keep track thereof. If the value of this element is less than 64, a six bit field can be used for the message reference. If, on the other hand, the value is greater than 63, but less than 8192, a 13 bit field can be used for the message reference. In mobile terminated references, the message reference element is also used to associate a user acknowledgment message with the previously sent SMS DELIVER message to be "user acknowledged" when the reply option element is set to, for example, 1. The message reference sent in an SMS USER ACK message is the same as that received in the SMS DELIVER message.

20

The user data unit information element is used to carry the text of the sender's message. An exemplary format for this element is illustrated in Figure 3(b). The user originating address may be included by the originating user or by the message center to identify the originating user of a message. An exemplary format for the user originating address information element is illustrated in Figure 3(c). Therein, the type of number field referred to in the third octet at bits 765, can include the information described in Table 3 below.

Table 3

BITS	DESCRIPTION
000	Unknown
001	International #
010	National #
011	Network-specific #
100	Subscriber #
101	Reserved
110	Abbreviated #
111	Reserved

The international, national and subscriber numbers are described, for example, in CCITT recommendation 1.330. A network specific number can be used to indicate administration and service numbers specific to a serving network. If the number type is one of unknown, international number, national number or subscriber number, then the numbering plan identification field further defines the number of the originating user as follows in Table 4.

Table 4

BITS 4 3 2 1	DESCRIPTION
0000	Unknown
0001	ISDN/telephony numbering plan (CCITT Recommendations E.164 and E.163)
0011	Data numbering plan (CCITT Recommendation X.121)
0100	Telex numbering plan (CCITT Recommendation F.69)
1001	Private numbering plan
1111	Reserved for extension
All other values are reserved.	

The address character fields of the user data unit can be coded as set forth in Table 5.

Table 5

5

10

15

BINARY VALUE	DIGIT
0000	Filler
0001	1
0010	2
0011	3
0100	4
0101	5
0110	6
0111	7
1000	8
1001	9
1010	0
1011	*
1100	#
All other values are reserved.	

The user originating subaddress information element identifies the
 subaddress of an originating user of a message. For example, a mobile having
 more than one terminal connected thereto may use the originating subaddress to
 discriminate at which of those terminals the message originated. An exemplary
 format for this information element is illustrated in Figure 3(d). Therein, the
 type of subaddress field found in octet 3 provides for the types illustrated below
 in Table 6.

Table 6

BITS	DESCRIPTION
000	(CCIT Recommendation X.213 or ISO 8348 AD2)
010	User-specified
All other values are reserved.	

5

The odd/even indicator in Figure 3(d) is used when the type of subaddress is user specified and the coding is Telephony Binary Coded Decimal (TBCD). A "0" in this field indicates that there is an even number of address signals, and a "1" in this field indicates that there are an odd number of address signals. The subaddress information, i.e., octet 4 and subsequent octets, can be encoded, for example, as described in CCITT Recommendation X.213 or ISO 8348 AD2. The message center time stamp information element provides a field wherein the message center may include a time at which the message was received by the message center.

10

To put these elements in perspective, an exemplary bit format for these information elements is illustrated in Figure 3(e).

15

After delivering the message, the base station then starts a timer. Upon reception of the R-DATA message, the mobile station provides a layer 3 acknowledgment to the base as follows. If the R-DATA message is acceptable to the mobile, the mobile responds by sending an R-DATA ACCEPT message with the same R-Transaction Identifier present in the R-DATA message. If the R-DATA message is not acceptable to the mobile, the mobile responds by sending an R-DATA REJECT message with the same R-Transaction Identifier present in R-DATA message, and with the R-Cause information element which informs the base of the reason for rejection of the message. If the base timer expires prior to receiving a layer 3 acknowledgment, the base may re-transmit the R-DATA message.

20

25

The following is an example of some of the foregoing messages in application. Consider the following text message to be sent to a mobile station: "Votre rendez-vous de cet après-midi est annulé! Salut, Eric". This message is 63 characters long. An exemplary SMS DELIVER message for conveying this
5 text message from the message center is illustrated in Figure 3(f). The SMS DELIVER message illustrated in Figure 3(f) is encapsulated in a layer 3 message at the message center and sent to the base station. The base station receives the layer 3 message from the message center and will then format a layer 3 R-DATA message to be delivered to the mobile station. For this particular example, the
10 R-DATA message would be as shown in Figure 3(g). Accordingly, a 77 octet layer 3 message will be transmitted to the mobile station over the air interface. The initial text message was 63 octets and 7 octets were added to identify the originator. Therefore, eight octets are presented as overhead.

Assuming that the mobile station has received and accepted the R-DATA
15 message, it will then return a layer 3 R-DATA ACCEPT message as, for example, illustrated in Figure 2(b), to the base station. This acknowledgment will be used by the base station to provide a message terminal acknowledgment to the message center. On the other hand, if the mobile station rejects the R-DATA message, then an R-DATA REJECT message will be sent to the base
20 station as, for example, illustrated in Figure 2(c).

Having described an exemplary process for mobile-terminated messages, an exemplary embodiment of the present invention relating to mobile-originated messages will now be described with respect to Figures 4(a)-4(c).

When a mobile station is camping on the digital control channel and is
25 required to send a message, the mobile first examines the SMS access flag broadcast by the base station on the BCCH indicating the maximum message length that the mobile station is authorized to send. If the R-DATA message length is greater than the maximum message length (in octets) authorized by the base station, the mobile refrains from transmitting the R-DATA message. If the
30 R-DATA message length is less than the maximum message length (in octets)

authorized by the base station, then the mobile may send the R-DATA message, providing that the registration rules allow the mobile to access the system. Much like the foregoing exemplary embodiment for mobile-terminated messages, a message is encapsulated in the layer 3 R-DATA message. In this case, however,
5 an SMS SUBMIT message (illustrated in Figure 4(a)) rather than an SMS DELIVER message is encapsulated.

Many of the information elements depicted in the exemplary SMS SUBMIT message of Figure 4(a) are identical to those found in the SMS DELIVER message described above with respect to Figure 3(a) and, therefore,
10 will not be further described here. However, the SMS SUBMIT message also has several different information elements which will now be described.

The delivery receipt information element is used to request the message center to provide a receipt to the originating mobile station upon delivery of the message to the destination user. For example, this field can include a binary "0"
15 to indicate that no delivery receipt is required or a binary "1" to indicate that a delivery receipt is required.

The validity period information element is used in the mobile originated message to indicate to the message center a time after which the message can be deleted if it has not been delivered to the destination user. For example, a
20 destination user may have his or her mobile powered off so that the message cannot be delivered by the message center. In such a situation, if the message is no longer of any value after some predetermined period of time, the validity period information element can be used to prevent the message center from wasting effort on obsolete messages.

The validity period field can be expressed in either relative or absolute
25 terms. For example, the length of the validity period may be expressed based on the time when the SMS SUBMIT message is received by the message center rendering this a relative representation. On the other hand, the validity period can also be expressed using an absolute time for termination, for example,
30 indicating that the message is to be terminated after 8:00 P.M. Est.

The deferred time information element provides the optional capability to allow the message center to deliver the message at a later time. As with the validity period information element, the time expression in this field can either be relative or absolute. An exemplary format for this information element using
5 a relative expression is illustrated in Figure 4(b) and a format using an absolute time expression is illustrated in Figure 4(c).

When the R-DATA message is sent, the mobile starts a timer. Upon reception of the R-DATA message, the base provides a layer 3 acknowledgment to the mobile, as follows. If the R-DATA message is acceptable to the base, it
10 responds by sending an R-DATA ACCEPT message with the same R-Transaction Identifier present in the R-DATA message to acknowledge. If the R-DATA message is not acceptable to the base, it responds by sending an R-DATA REJECT message with the same R-Transaction Identifier present in the R-DATA message to acknowledge, and with the R-Cause information element explaining
15 the rejection. If the mobile timer expires prior to receiving a layer 3 acknowledgment, the mobile may re-transmit R-DATA.

If the mobile station is already assigned a traffic channel (e.g., the mobile is involved in a call), the mobile sends the R-DATA message to the base station by either using a FACCH or SACCH with the transmission service indicating L2
20 acknowledge mode. The mobile station then starts a timer. Upon reception of the R-DATA message, the base station provides a layer 3 acknowledgment to the mobile, as follows. If the R-DATA message is acceptable to the base, it responds by sending an R-DATA ACCEPT message with the same R-Transaction Identifier present in the R-DATA message to acknowledge. If the R-DATA
25 message is not acceptable to the base station, it shall respond by sending an R-DATA REJECT message with the same R-Transaction Identifier present in the R-DATA message to acknowledge, and with the R-Cause information element. If the mobile's timer expires prior to receiving a layer 3 acknowledgment, the mobile station may re-transmit R-DATA.

The foregoing description has generally referred to, for example, mobile and base station communications without describing such stations *per se*. Accordingly, the following description is intended to provide an example of such mobile and base stations in general with respect to Figure 5.

5 Figure 5 represents a block diagram of an exemplary cellular mobile radiotelephone system according to one embodiment of the present invention which can be used to implement the foregoing. The system shows an exemplary base station 110 and a mobile 120. The aforescribed message signalling between base and mobile stations can be performed using these, or other,
10 apparatuses. The base station includes a control and processing unit 130 which is connected to the MSC 140 which in turn is connected to the public switched telephone network (not shown).

 The base station 110 for a cell includes a plurality of voice channels handled by voice channel transceiver 150 which is controlled by the control and
15 processing unit 130. Also, each base station includes a control channel transceiver 160 which may be capable of handling more than one control channel. The control channel transceiver 160 is controlled by the control and processing unit 130. The control channel transceiver 160 broadcasts control information over the control channel of the base station or cell to mobiles locked
20 to that control channel. The voice channel transceiver broadcasts the traffic or voice channels which can include digital control channel location information as described previously.

 When the mobile 120 first enters the idle mode, it periodically scans the control channels of base stations like base station 110 to determine which cell to
25 lock on or camp to. The mobile 120 receives the absolute and relative information broadcast on a control channel at its voice and control channel transceiver 170. Then, the processing unit 180 evaluates the received control channel information which includes the characteristics of the candidate cells and determines which cell the mobile should lock to. The received control channel
30 information not only includes absolute information concerning the cell with

which it is associated, but also contains relative information concerning other cells proximate to the cell with which the control channel is associated. These adjacent cells are periodically scanned while monitoring the primary control channel to determine if there is a more suitable candidate. Additional
5 information relating to specifics of mobile and base station implementations can be found in copending U.S. Patent Application Serial No. 07/967,027 entitled "Multi-Mode Signal Processing" filed on October 27, 1992 to P. Dent and B. Ekelund, which disclosure is incorporated here by reference.

While the present invention has been described using the foregoing
10 exemplary embodiments, these embodiments are intended to be illustrative in all respects, rather than restrictive of the present invention. For example, although the phrase "remote device" has been used throughout this specification, the present invention can be applied to systems and methods wherein any type of remote equipment which supports the message service is originating or receiving
15 the message, e.g., PCS equipment, a portable unit, a personal digital assistant, a data terminal, etc.

Moreover, although the foregoing exemplary embodiments refer to messages which originate at "mobiles", those skilled in the art will also recognize that the present invention can also be applied where other types of equipment
20 originate the message, e.g., PSTNs or data networks. Further, although the present invention has been exemplified by embodiments which refer to the GSM, the present invention is equally applicable to any system or standard (e.g., PDC or ADC) wherein messages may be routed using methods or systems that include service centers or analogous equipment. Thus, the scope of the present invention
25 is instead set forth by the appended claims and encompasses any and all equivalents and modifications embraced thereby.

WHAT IS CLAIMED IS:

1. A method for sending messages between users in a radiocommunication network over a digital channel comprising the steps of:
 sending a message from a first user at a remote station to said
5 network via said digital channel for delivery to a second user at another remote station;
 including, as part of said message, a deferred delivery time at which said network is to transmit said message to said second user; and
 transmitting said message to said second user at said another
10 remote station at said deferred delivery time.
2. A mobile station comprising:
 a processor which processes a text message input by a user for delivery to a recipient, said processor including, as part of said text message, a
15 field indicating a deferred delivery time at which said message is to be delivered to said recipient; and
 a transmitter for transmitting said text message including said field.
3. The method of claim 1, wherein said digital channel is a digital control channel.
- 20 4. The method of claim 1, wherein said digital channel is a digital traffic channel.
5. A method for sending messages between users in a radiocommunication network over a digital channel comprising the steps of:

sending a message from a first user at a remote station to said network via said digital channel for delivery to a second user at another remote station;

including, as part of said message, a privacy indicator that denotes
5 a level of privacy associated with said message;

transmitting said message to said second user at said another remote station; and

requiring a code associated with said privacy indicator to be input by said second user prior to outputting said message at said another remote
10 station.

6. The method of claim 5, wherein said digital channel is a digital control channel.

7. The method of claim 5, wherein said digital channel is a digital traffic channel.

15 8. A mobile station comprising:
a receiver for receiving a text message via a digital channel over an air interface; and
a processor for processing said received text message and requiring an input code prior to outputting said text message.

20 9. The mobile station of claim 8, wherein said text message includes a privacy indicator and said processor requires a code associated with said privacy indicator to be input prior to outputting said message.

10. A mobile station comprising:

a transmitter for transmitting a text message via a digital channel over an air interface; and

a processor for appending a privacy indicator to said text message.

5 11. The mobile station of claim 8, wherein said digital channel is a digital control channel.

 12. The mobile station of claim 8, wherein said digital channel is a digital traffic channel.

 13. The mobile station of claim 10, wherein said digital channel is a
10 digital control channel.

 14. The mobile station of claim 10, wherein said digital channel is a digital traffic channel.

 15. A method for sending messages between users in a radiocommunication network over a digital channel comprising the steps of:
15 sending a message from a first user at a remote station to said network via said digital channel for delivery to a second user at another remote station;

 including, as part of said message, an urgency indicator that denotes a level of urgency associated with said message;

20 transmitting said message to said second user at said another remote station; and

 outputting said message at said another remote station based on said urgency indicator.

 16. The method of claim 15, wherein said step of outputting further
25 comprises the step of:

outputting said message as one of a plurality of messages in an order based upon said urgency indicator.

17. The method of claim 15, wherein said digital channel is a digital control channel.

5 18. The method of claim 15, wherein said digital channel is a digital traffic channel.

19. A mobile station comprising:
a receiver for receiving a text message via a digital channel over an air interface; and
10 a processor for processing said received text message and requiring based upon an urgency indicator in said received text message.

20. The mobile station of claim 19, wherein said processor outputs text messages in an order based upon said urgency indicator.

21. A mobile station comprising:
15 a transmitter for transmitting a text message via a digital channel over an air interface; and
a processor for appending an urgency indicator to said text message.

20 22. The mobile station of claim 19, wherein said digital channel is a digital control channel.

23. The mobile station of claim 19, wherein said digital channel is a digital traffic channel.

24. The mobile station of claim 21, wherein said digital channel is a digital control channel.

25. The mobile station of claim 21, wherein said digital channel is a digital traffic channel.

5 26. A method for sending messages between users in a radiocommunication network over a digital channel comprising the steps of:
 sending a message from a message center via said digital channel for delivery to a user at a remote station;
 including, as part of said message, an information element
10 indicating that said user is to reply to said message center in response to said message;
 transmitting said message to said user at said remote station; and
 responding to said message, by said user at said remote station, by transmitting a user acknowledge signal to said message center.

15 27. The method of claim 26, wherein said digital channel is a digital control channel.

 28. The method of claim 26, wherein said digital channel is a digital traffic channel.

20 29. A mobile station comprising:
 a receiver for receiving a text message including a request for acknowledgement via a digital channel over an air interface;
 a transmitter for sending signals over said air interface; and
 a processor for processing said received text message and commanding said transmitter to send an acknowledgement of said text message.

30. The mobile station of claim 29, wherein said digital channel is a digital control channel.

31. The mobile station of claim 29, wherein said digital channel is a digital traffic channel.

5 32. A method for sending messages between users in a radiocommunication network over a digital channel comprising the steps of:
 sending a message from a first user to said network via said digital channel for delivery to a second user at a remote station;
 including, as part of said message, an originating address of said
10 first user and a subaddress of said first user; and
 transmitting said message to said second user at said remote station.

33. The method of claim 32, wherein said digital channel is a digital control channel.

15 34. The method of claim 32, wherein said digital channel is a digital traffic channel.

 35. A remote station comprising:
 a transmitter for transmitting a text message via a digital channel over an air interface; and
20 a processor for appending an originating address of said remote station and a subaddress of a terminal associated with said remote station to said text message.

25 36. The mobile station of claim 35, wherein said digital channel is a digital control channel.

37. The mobile station of claim 35, wherein said digital channel is a digital traffic channel.

38. A method for sending messages between users in a radiocommunication network over a digital channel comprising the steps of:

5 sending a message from a first user at a remote station to said network via said digital channel for delivery to a second user at another remote station;

including, as part of said message, a request for a subsequent indication to said remote station that said message was delivered by said
10 network;

transmitting said message to said second user at said another remote station; and

providing an indication to said remote station that said message was delivered.

15 39. The method of claim 38, wherein said digital channel is a digital control channel.

40. The method of claim 38, wherein said digital channel is a digital traffic channel.

20 41. The method of claim 38, wherein said providing step further comprises the step of:


sending said indication to said remote station from said network.

42. A remote station comprising:
a transmitter for transmitting a text message via a digital channel over an air interface; and

a processor for appending a request for a subsequent indication to said remote station that said message was delivered to said text message.

43. The mobile station of claim 42, wherein said digital channel is a
5 digital control channel.

44. The mobile station of claim 42, wherein said digital channel is a digital traffic channel.

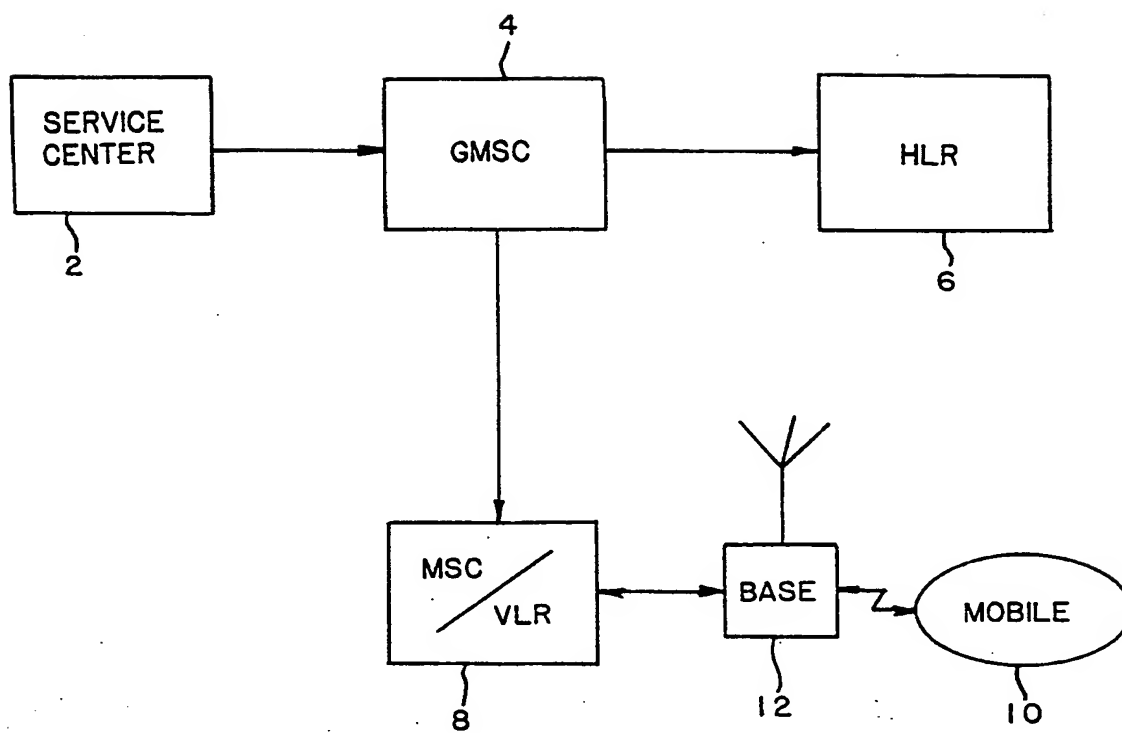**FIGURE 1**

Information Element	Type	Length (octets)
Message Type	M	1
R-Transaction Identifier	M	1
R-Data Unit	M	2 - 241
Message Center Address	O	2 - 12

FIGURE 2(a)

Information Element	Type	Length (bits)
Message Type	M	8
R-Transaction Identifier	M	8
		Total = 16

FIGURE 2(b)

Information Element	Type	Length (bits)
Message Type	M	8
R-Transaction Identifier	M	8
R-Cause	M	8
		Total = 24

FIGURE 2(c)

Information Element	Direction	Type	Length
Message Type Indicator (MTI)	B → MS	M	3 bits
Reply Option (RO)	B → MS	M	1 bits
Urgency Indicator (UI)	B → MS	M	2 bits
Privacy Indicator (PI)	B → MS	M	2 bits
Message Reference	B → MS	M	6 or 13 bits
User Data Unit	B → MS	M	2 - * octets
User Originating Address	B → MS	O	2 - * octets
User Originating Subaddress	B → MS	O	2 - * octets
Message Center Time Stamp	B → MS	O	8 octets

FIGURE 3(a)

Information Element	Reference	Direction	Type	Length
Message Type Indicator (MTI)		MS → B	M	3 bits
Response Code (RC)		MS → B	M	4 bits
Message Reference		MS → B	M	6 or 13 bits
User Data Unit		MS → B	M	1 - *
User Destination Address		MS → B	O	2 - * octets
User Destination Subaddress		MS → B	O	2 - * octets

FIGURE 3(b)

Bits								Octet
8	7	6	5	4	3	2	1	
Length Indicator (in octets)								1
0	0	0	Encoding identifier					2
spare								
User Data								3
-								
User Data								n

FIGURE 3(c)

Bits								Octet
8	7	6	5	4	3	2	1	
0 0 0 0 Reserved				User Originating Address 0 1 0 0 Information Element Identifier				1
Length of user originating address contents								2
Address coding = 1	Type of number			Numbering plan identification				3
1'st address character								4
.								.
n'th address character								n

FIGURE 3(d)

Bits								Octet
8	7	6	5	4	3	2	1	
0	0	0	0	User originating subaddress 0 0 1 1 Information element identifier				1
Length of user originating subaddress contents								2
0 RSVD	Type of subaddress			odd/ even indica	0	0	0	3
Subaddress information								4 etc

FIGURE 3(e)

Bits								Octet
8	7	6	5	4	3	2	1	
0 spare	UI		PI		MTI			1
0/1 ext	Message Reference (MSB)						RO	2
1 ext	Message Reference (LSB)							2a
User Data Unit								3
User Data Unit								etc

FIGURE 3(f)

Information Element	Type	Length	Description
Message Type Indicator (MTI)	M	3 bits	Part of the mandatory first octet
Reply Option (RO)	M	1 bit	Part of the mandatory first octet
Urgency Indicator (UI)	M	2 bits	Part of the mandatory first octet
Message Reference	M	1 octet	Mandatory octet
User Data Unit	M	65 octets	Text message
User Originating Address	O	7 octets	Assumed to be 7 digit number, coded TBCD
User Originating Subaddress	O	0 octet	Not present
Message Center Time Stamp	O	0 octet	Not present
		total = 74 octets	

FIGURE 3(g)

5 / 8

SUBSTITUTE SHEET (RULE 26)

Information Element	Type	Length (octets)	Description
Message Type	M	1	Mandatory first octet
R-Transaction Identifier	M	1	Mandatory second octet
R-Data Unit	M	76	SMS DELIVER encapsulated within this IE
Message Center Originating Address	O	0	Assumed to be not present
		Total = 78 octets	

FIGURE 3(h)

Information Element	Reference	Direction	Type	Length
Message Type Indicator (MTI)		MS → B	M	3 bits
Urgency Indicator (UI)		B → MS	M	2 bits
Privacy Indicator (PI)		B → MS	M	2 bits
Message Reference		MS → B	M	6 or 13 bits
Delivery Receipt (DR)		MS → B	M	1 bits
User Destination Address		MS → B	M	2 - * octets
User Data Unit		MS → B	M	1 - * octets
User Destination Subaddress		MS → B	O	2 - * octets
Validity Period		MS → B	O	2 or 8 octets
Deferred Delivery Time		MS → B	O	2 or 8 octets

FIGURE 4(a)

6 / 8

SUBSTITUTE SHEET (RULE 26)


Bits								Octet
8	7	6	5	4	3	2	1	
0	0	0	Format = 0	Deferred Delivery Time 0 0 1 0				1
Reserved				Information Element Identifier				
Deferred Delivery Time - relative								2

FIGURE 4(b)

Bits								Octet
8	7	6	5	4	3	2	1	
0 Reserved	0	0	Form at = 1	Deferred Delivery Time 0 0 1 0 Information Element Identifier				1
Deferred Delivery Time - absolute								2
Deferred Delivery Time - absolute								3
Deferred Delivery Time - absolute								4
Deferred Delivery Time - absolute								5
Deferred Delivery Time - absolute								6
Deferred Delivery Time - absolute								7
Deferred Delivery Time - absolute								8

FIGURE 4(c)

FIGURE 5

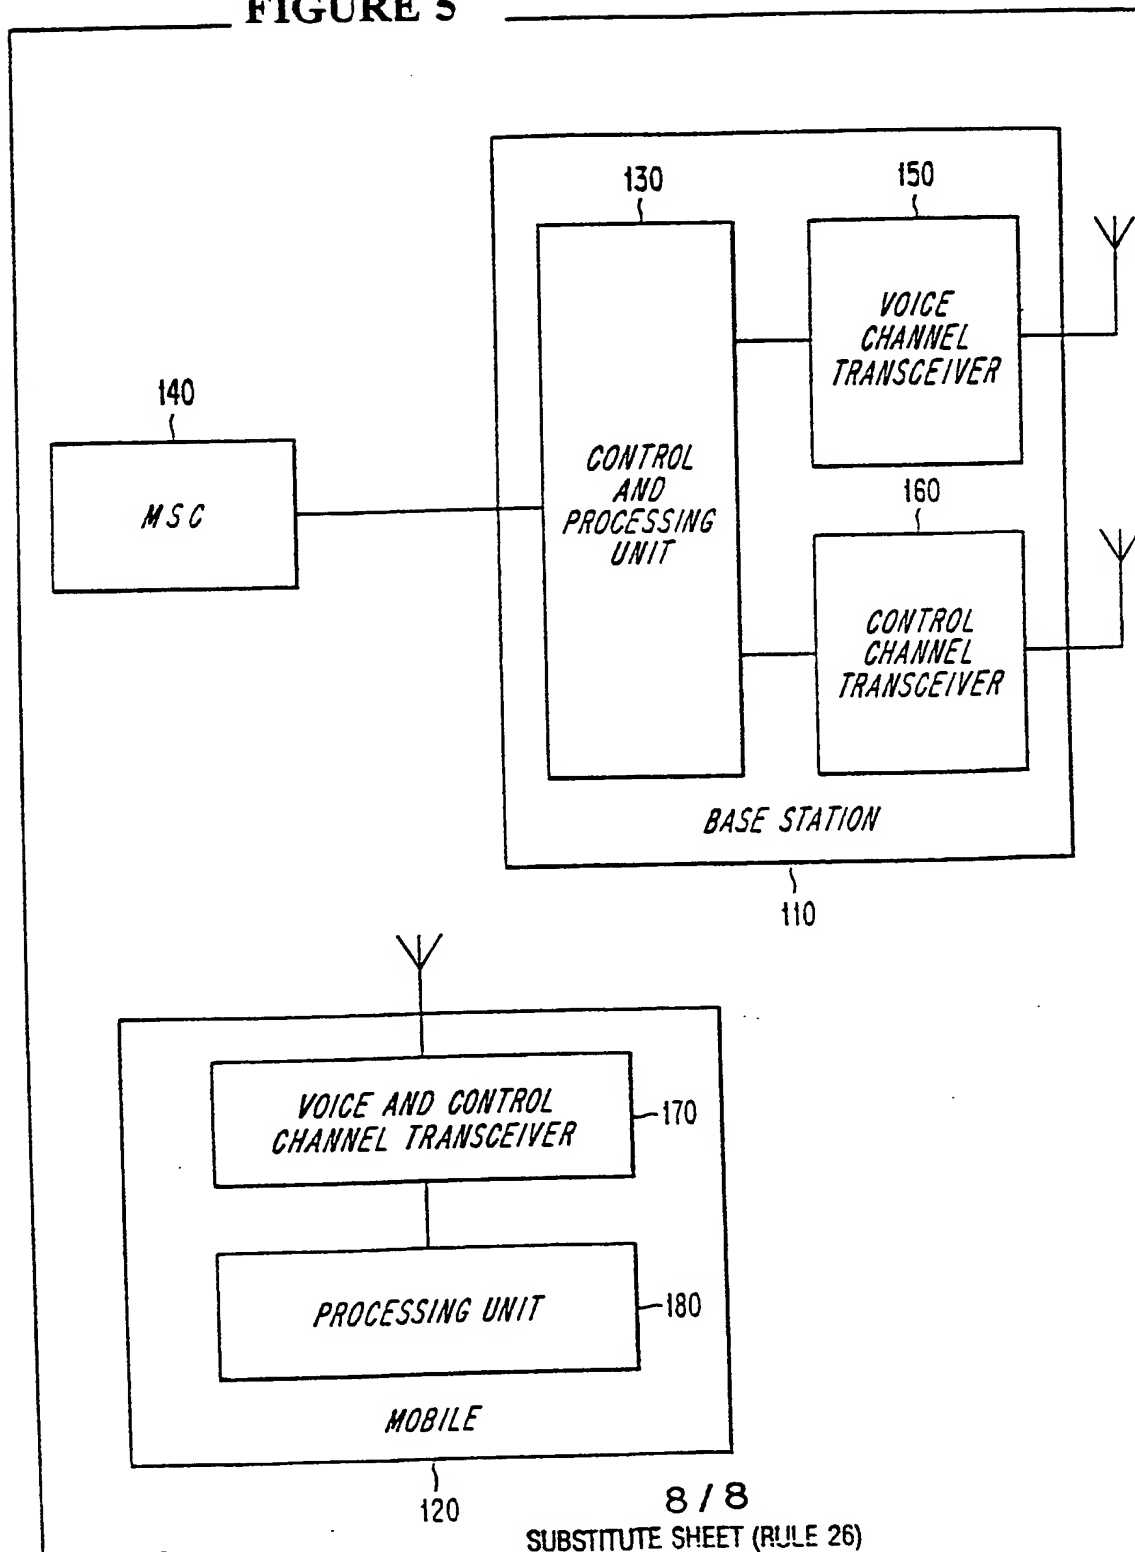

INTERNATIONAL SEARCH REPORT

 International application No.
PCT/US94/12614

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) : H04J 3/16; H04Q 7/00

US CL : 370/95.1, 95.3, 85.6; 340/825.44, 825.5, 825.51; 455/58.1

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 370/95.1, 95.3, 85.6; 340/825.44

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	Internetworking With TCP/IP, Volume I, 1991, D. Comer, Pages 92,93,93, Fig.7.3	1,2
X	US, A, 5,146,217 (HOLMES ET AL) 08 September 1992, Figs.2 and 3.	8,9
---		-----
Y		5-44
Y	US, A, 4,788,543 (RUBIN) 29 November 1988, Fig.2.	3-44

☐ Further documents are listed in the continuation of Box C.
 ☐ See patent family annex.

* Special categories of cited documents:	
A document defining the general state of the art which is not considered to be part of particular relevance	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
E earlier document published on or after the international filing date	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
O document referring to an oral disclosure, use, exhibition or other means	
P document published prior to the international filing date but later than the priority date claimed	*Z* document member of the same patent family

Date of the actual completion of the international search

30 JANUARY 1995

Date of mailing of the international search report

14 MAR 1995

 Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer


AMIT PATEL

Telephone No. (703) 308-5347

THIS PAGE BLANK (USPTO)